

Elevation & Plot Plan Submittal Requirements

A site evaluation for an on-site sewage disposal system on your property has been approved for an above grade system. The placement of the septic tank will be required to be at a specific elevation. In order for this Division to determine that elevation and approve your permit, a plot plan must be submitted for review. Two (2) copies of a plot plan (8½ " x 11" or 8½" x 14") must be submitted to this Division.


Your Plot Plan Must Show All of the Following:

1. Proposed location of the house.
2. Number of bedrooms in the house.
3. Location of the approved test site at which you are proposing to place the absorption bed. Outline the area of the proposed drainfield.
4. Proposed location of the septic tank(s). The tank is typically between 10'-20' from the foundation.
5. Distance between the house and septic tank.
6. Distance between the septic tank and the absorption bed.
7. Location of a reserve area.
8. Location of the benchmark.
9. Property lines including lot size.

Your plot plan must also indicate the following elevations accurate to nearest tenth (0.1) of a foot:

1. A benchmark reference elevation. This elevation should be a point on a fixed, permanent object, (i.e., a fire hydrant, nail in tree, nail in utility pole). This elevation should be recorded as 100.00 and all other elevations referenced to this benchmark.
2. The elevation at the test site.

Example Plot Plan:

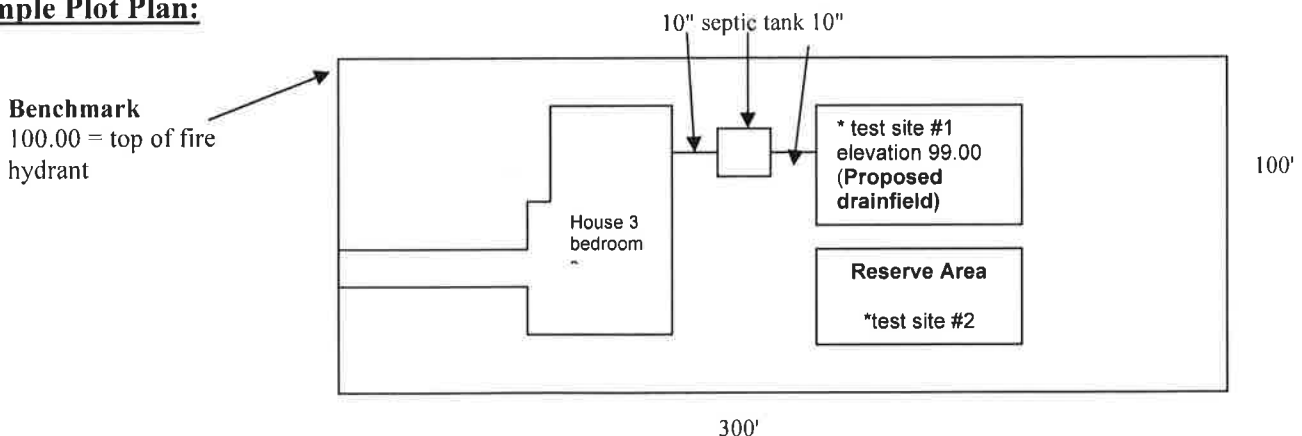

Wayne County Health Department • Environmental Health Division • OSDS Program
33030 Van Born, Wayne, MI 48184
Telephone: (734) 727-7400 Fax: (734) 727-7165